

Multiple Output Converters and Custom Converters


16-40Vin , Dual Output 5.0V/1A



Special features:


- Input voltage: 16-40V
- Output: 5V/1A, 5V/1A
- Output voltage range: 5V-15V
- Efficiency up to 82%
- High thermal performance
- Input under voltage protection, output over current protection, output short protection and over temperature protection
- Output power up to 30KW
- Package: open-frame, encapsulated
- Size(mm): 38.1x23.6x10.6 / Open framed
40.5x26.0x12.7/ Encapsulated

Triple Output 600W




- Input voltage: 42V-55V
- Output: 8V/70A, 5V/5.5A, -12V/1.6A
- High efficiency: 93% at full load & 48Vin
- Input over/under voltage protection, output over current protection, output over voltage protection
- Internal over temperature protection
- Optional enable logic: negative or positive, optional protection mode: autorecovery or lock
- Conduction cooling, baseplate package
- Low profile(mm): 75.00x50.00x10.00

Triple output 220W




- Input voltage: 24V-42V
- Output: 9V/24A, 5V/2A, -5V/0.2A
- Output over voltage protection, output over current protection
- Input under voltage protection
- Internal over temperature protection
- Size (mm): 56.00x50.00x5.60

Triple Output 50W




- Input voltage: 24V-42V
- Output voltage: 12V, 5V, 3.3V
- Output over voltage protection, output over current protection
- Input under voltage protection
- Internal over temperature protection
- Size (mm): 56.60x34.50x9.00

Triple Output 8W

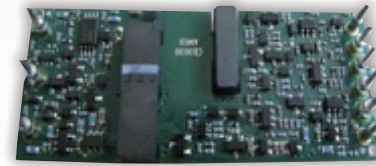


- Input voltage: 18V-36V
- Isolated triple output
- Output: 5V/2.5A, 5V/2.5A, 5V/0.6A
- High efficiency: 87% at full load & 24Vin
- Input under voltage protection
- Output over voltage protection
- Internal over temperature protection
- Optional enable logic: negative or positive, optional protection mode: autorecovery or lock
- Package: open-frame, encapsulated

Triple Output 14W



- Input voltage: 9V-12.6V
- Output voltage: 1.2V, 3.3V, trimmable 1V-3.3V
- Output over current protection
- Internal over temperature protection
- Package: Encapsulated
- Low profile (mm): 30.50x25.50x10.50

Triple Output 9W



- Input voltage: 3V-5.5V
- Output voltage: 1.2V, 3.3V, trimmable 1V-3.3V
- Output over current protection
- Internal over temperature protection
- Package: Encapsulated
- Low profile (mm): 26.50x20.50x10.50

Quad Output Custom ATX Power Board



- Input voltage: 18V-36V
- Output voltage: 5V, 3.3V, 5V, 12V
- Input current: 10A, 5A, 2A, 10A
- Input reverse connecting protection, input/output over voltage protection
- Size (mm): 203.50x90.00